


Ultra stiff die cast chassis  
Ribbed paper cone  
High power handling capacity

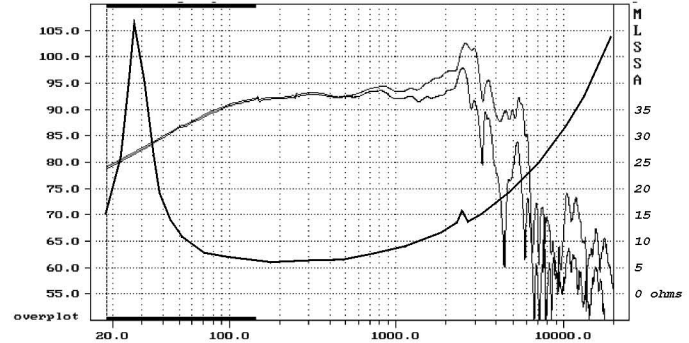

Nominal impedance . . . . . 8 ohms  
Resonance . . . . . 26.86 Hz  
Power handling (IEC) . . . . . 100 W  
Sensitivity (2.83V/1m) . . . . . 92.0 dB

Resistance (DC) . . . . . 5.37 ohms  
Inductance . . . . . 0.62 mH  
Xmax . . . . . ± 3.0 mm  
Qms . . . . . 2.37  
Qes . . . . . 0.35  
Qts . . . . . 0.31  
Vas . . . . . 190.32 l

Voice coil diam. . . . . 45 mm  
Voice coil length . . . . . 12 mm  
Former . . . . . aluminium  
Layer(s) . . . . . 2  
Wire type . . . . . round  
Force factor . . . . . 9.38 NA<sup>-1</sup>  
Moving mass . . . . . 34.16 gr

Cone material . . . . . paper  
Suspension . . . . . foam  
Chassis . . . . . zamack  
Total mass . . . . . 3.2 kg

